

## Submersible Transmitter

# ATM.ECO/N - Analog Level Transmitter Temperature compensated



### CUSTOMER BENEFITS

- Entry level series into precision level measurement
- Excellent long term stability allow accurate measurements over a long period
- High measurement accuracy is ensured by sophisticated digital temperature compensation algorithms
- Fast customization thanks to configurable product design
- Available with overvoltage protection

# Technical Specifications

## PRESSURE MEASURING RANGE (MH2O)

	1 ... 5, (1)	> 5 ... 20	> 20 ... 250
Overpressure	3 bar	3 x FS ( $\geq$ 3 bar)	3 x FS
Burst pressure, (2)	> 200 bar	> 200 bar	> 200 bar
Accuracy, (3) ( $\pm$ % FS)	$\leq$ 0.25	$\leq$ 0.25	$\leq$ 0.25
Total Error, (4) ( $\pm$ % FS)			
-5 ... 50°C, (typ. / max.)	$\leq$ 1.0 / 1.5	$\leq$ 0.7 / 1.0	$\leq$ 0.7 / 1.0
-5 ... 80°C, (typ. / max.)	$\leq$ 2.0 / 2.5	$\leq$ 1.0 / 1.5	$\leq$ 1.0 / 1.5
Response time, (typ.)	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS
Long term stability, (5)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

(1) 0.5 mH2O on request

(2) Transducer

(3) Zero based accuracy according to DIN-16086, incl. hysteresis and repeatability at ambient temperature

(4) Total error including accuracy and temperature influences at maximum signal span (16 mA / 10 V DC)

(5) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

## TEMPERATURE RANGE

Operating temperature	-5 ... 80°C (1)
Process temperature	-5 ... 80°C (1)
Storage temperature	-40 ... 80°C

(1) For operating temperature > 50°C, PE or FEP cable must be used

## ELECTRICAL SPECIFICATIONS

	4 ... 20 mA	0 ... 5 V	0 ... 10 V
Power supply	9 ... 33 VDC	10 ... 30 VDC	12 ... 30 VDC
Supply influence	< 0.05% FS	< 0.05% FS	< 0.05% FS
Current consumption		3 mA	3 mA
Circuit diagram			
Load resistance		$R_L > 10k\Omega$	$R_L > 10k\Omega$
Load influence	< 0.05% FS	< 0.05% FS	< 0.05% FS

## QUALIFICATIONS

	Standard	Level	Typical interferences
EN 60068-2-6	Vibration	10 G (4 ... 2000 Hz / $\pm 10$ mmpp)	
EN 60068-2-27	Shock	100 G (impulse duration 6 ms)	
EN 55022	Emission, class B	< 30 dB $\mu$ V/m (0.03 ... 1 GHz)	
EN 61000-4-2	Electrostatic discharge	8 kV contact / 15 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08 ... 2.7 GHz, 3s)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	4 kV	Motors, valves
EN 61000-4-5	Surge	Line-Line: 0.5 kV/42 $\Omega$ , Line-Earth: 1 kV/42 $\Omega$	Overvoltage
EN 61000-4-6	Conducted RF	3 V (0.15 ... 80 MHz, 3 s)	Frequency converters

## PHYSICAL SPECIFICATIONS

Materials	
Transducer	Stainless steel (316L / 1.4435)
Housing	Stainless steel (316L / 1.4404)
Seals	Viton (Standard), EPDM, Kalrez, NBR
Cable	PUR, FEP, PE, PVC
Weight (1)	210 g

(1) Specification for a ATM.ECO/N, closed, without cable

## Equipment

---

### OVERVIEW

10.00.0091	
10.00.0091	Accessories overview

## Additional documents

---

### OPERATING AND SAFETY INSTRUCTIONS

Article number	
10.88.0092	DMM029

# Ordering information

	X.	XXXX.	XXXX.	XX.	XXX
<b>Type</b>					
	ATM.ECO/N				
<b>Pressure type</b>					
	Gauge	1			
	Absolute (vacuum)	2			
<b>Pressure measuring range</b>					
	100 mbar ... 25 bar	XX			
<b>Process connection</b>					
	Closed (Fig. 1)	55			
	Closed, (1.4435), for ACS (Fig. 1)	59			
	Open (Fig. 2)	56			
	G 1/4 M (Fig. 3)	11			
	G 1/2 M (Fig. 3)	13			
	Customized	99			
<b>Electrical connection</b>					
	PE cable, black, IP 68 (4) (5)	13			
	PUR cable, black, IP 68 (4) (6)	15			
	FEP cable, black, IP 68 (4)	21			
	PVC cable, blue, IP 68, ACS certified (4)	14			
	Connectable version, IP68, M12 (Lumberg RSF4), (Fig. 4), (3)	07			
	Customized	99			
<b>Output signal</b>					
	0 ... 5 VDC	46			
	0 ... 10 VDC	47			
	4 ... 20 mA	05			
	4 ... 20 mA surge protection	08			
<b>Accuracy</b>					
	$\leq \pm 0.25 \% \text{ FS}$			1	
<b>Temperature range</b>					
	-5 ... 50°C compensated process temperature: -5 ... 50°C	(allowed)		4	
	-5 ... 80°C compensated process temperature: -5 ... 80°C	(allowed)		5	
<b>Option 1</b>					
<b>Option 2</b>					
	Electronics packed in gel: Gauge pressure				C
	Electronics packed in gel: Absolute pressure				D
<b>Option 3</b>					
	Ballast weight 1.4435				B
	Cutting ring connection G 1/2 M				
	Strain relief				
	Seals: Viton (standard)				U
	Seals: EPDM				S
	Seals: Kalrez (Level)				T
	Seals: NBR (ACS)				H

- (3) Connector with required cable has to be ordered separately (KART100)
- (4) Please specify the required cable length and medium
- (5) Suitable for drinking water (food approved)
- (6) For operating temperature > 50°C, PE or FEP cable must be used

# Technical drawings

## Dimensions

Fig. 1 Closed version

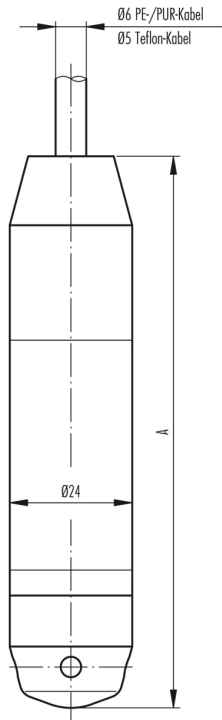


Fig. 2 Open version

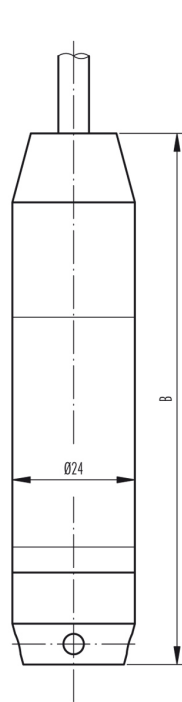


Fig. 3 With process connection


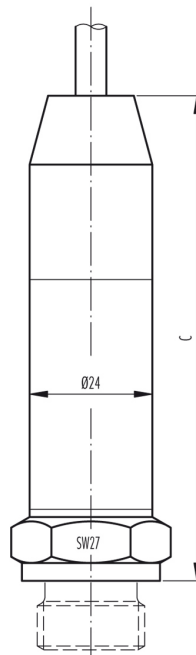


Fig. 4 Electrical connection, connectable

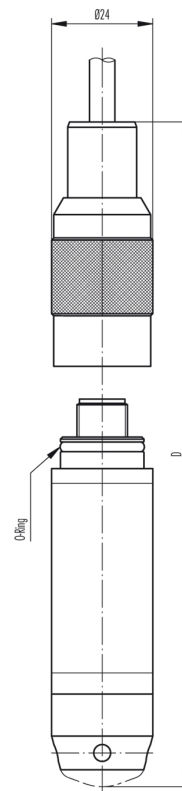

	A [mm]	B [mm]	C [mm]	D [mm]	Weight [g]
without ballast weight	88	84	on request*	119*	ca. 210
with ballast weight	175	171	on request*	201*	ca. 470

\*C: Depending on process connection

Colour	2-wire	3-wire
white	+Vin	+Vin
yellow	Pout	GND
brown		Pout
grey	EP (only Ex)	

Specifications may change without notice.

**ST5 Headquarters, Switzerland:**  
ST5 Sensor Technik Sirmach AG  
Rütihofstrasse 8 | 8370 Sirmach | Switzerland  
sales@stssensors.com | www.stssensors.com

**ST5 China:**  
ST5 Sensor Technology (Shanghai) Co. Ltd  
Room 2603-2606 | North Building, Fortune | 108 Square  
Lane 1839 | Qixin Road | Minhang District | Shanghai | China  
sales@stssensors.com | www.stssensors.com.cn

**ST5 France:**  
ST5 France  
844 Route de la Caille | 74350 Allonzier la Caille | France  
info-fr@stssensors.com | www.stssensors.fr

**ST5 Germany:**  
ST5 Sensoren Transmitter Systeme GmbH  
Poststrasse 7 | 71063 Sindelfingen | Germany  
info-de@stssensors.com | www.stssensors.de

**ST5 Great Britain:**  
ST5 Great Britain Ltd.  
Box 3942 | Warwick | CV34 9AE | United Kingdom  
contact@stssensors.com | www.stssensors.co.uk

**ST5 Italy:**  
ST5 Italia s.r.l.  
Via Lambro 36 | 20090 Opera (MI) | Italy  
info-italia@stssensors.com | www.stssensors.it