

Pressure Transmitter - FM / FM-C certified

ATM.1ST/IS - High Precision Transmitter



CUSTOMER BENEFITS

- Certificate: FM, FM-C, IECEx & ATEX
- High accuracy is ensured by sophisticated digital temperature compensation algorithms
- Stainless steel and titanium version for use in acidic or otherwise aggressive media
- Short response times suitable for dynamic pressure measurements
- Fast customization thanks to configurable product design

Technical Specifications

FM / FM-C APPROVAL

FM	3028239
FM-C	3028239C

PRESSURE MEASURING RANGE (BAR)

	0.1 ... 0.5, (1)	> 0.5 ... 2	> 2 ... 100
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure, (5)	> 200 bar	> 200 bar	> 850 bar
Accuracy, (6), (\pm % FS)	≤ 0.10	$\leq 0.10 / \leq 0.05$, (8)	$\leq 0.10 / \leq 0.05$, (8)
Total Error, (7), (\pm % FS)			
0 ... 70°C, (typ./max.)	$\leq 0.8 / 1.0$	$\leq 0.3 / 0.5$	$\leq 0.3 / 0.5$
-25 ... 100°C, (typ./max.)	$\leq 1.3 / 1.5$	$\leq 0.75 / 1.0$	$\leq 0.75 / 1.0$
0 ... 70°C, (8), (typ./max.)	n.a.	$\leq 0.2 / 0.4$	$\leq 0.2 / 0.4$
-40 ... 125°C, (8), (typ./max.)	n.a.	$\leq 0.5 / 0.8$	$\leq 0.5 / 0.8$
Response time, (typ.)	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS
Long term stability, (9)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

	> 100 ... 600, (2), (4)	> 600 ... 690, (3), (10)
Overpressure	3 x FS ($\leq 850 / \leq 1500$ bar)	1500 bar
Burst pressure, (5)	> 850 / ≤ 1500 bar	> 1500 bar
Accuracy, (6), (\pm % FS)	≤ 0.10	≤ 0.25
Total Error, (7), (\pm % FS)		
0 ... 70°C, (typ./max.)	$\leq 0.3 / 0.5$	$\leq 0.3 / 0.5$
-25 ... 100°C, (typ./max.)	$\leq 0.75 / 1.0$	$\leq 0.75 / 1.0$
0 ... 70°C, (8), (typ./max.)	n.a.	n.a.
-40 ... 125°C, (8), (typ./max.)	n.a.	n.a.
Response time, (typ.)	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS
Long term stability, (9)	< 0.1% FS / < 0.2% FS	< 0.1% FS / < 0.2% FS

(1) 50 mbar on request

(2) Titanium available ≤ 400 bar (burst pressure > 550 bar)

(3) Process connection frontal and flush diaphragm available ≤ 600 bar

(4) Overpressure and burst pressure 1500 bar (stainless steel) optional

(5) Transducer

(6) Zero based accuracy according to DIN-16086, incl. hysteresis and repeatability at ambient temperature

(7) Total error including accuracy and temperature influences at maximum signal span (16 mA)

(8) Active compensated



(9) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

(10) Maximum pressure allowed by FM/FMc certification body 690bar

TEMPERATURE RANGE

Operating temperature	-40...125 °C
Process temperatur	-40...150 °C
Storage temperatur	-40...125 °C

ELECTRICAL SPECIFICATIONS

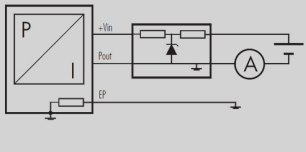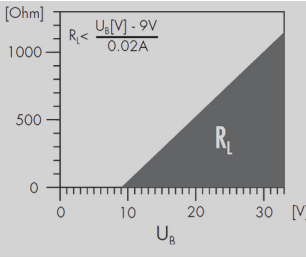	4 ... 20 mA
Power supply	9...28 V DC
Supply influence	< 0.05% FS
Circuit diagram	
Load resistance	
Load influence	< 0.05% FS

ATEX APPROVAL

Certificate, (1)	SEV 09 ATEX 0108		
Gas	II 1G Ex ia IIB/IIC T3 ... T6	EN 60079-0 / -11 / -26	
Dust	II 1D Ex ia IIIC IP6x T140°C ... T70°C	EN 61241-0 / -11	
Mining	I M1 Ex ia I	EN 50303	
Temperature class, (2)	T6	T4	T3
Ambient temperature	-40 ... 50°C	-40 ... 90°C	-40 ... 125°C
Process temperature	-40 ... 50°C	-40 ... 100°C	-40 ... 150°C
Maximum values of the intrinsically safe circuit	28V / 93 mA / 0.65W		

(1) For detailed Ex specifications see certificate and operating and safety instructions

(2) Without any information about temperature class the transmitter will be delivered for T4

ADDITIONAL APPROVALS

IEC Ex	IEC Ex SEV 10.0003
--------	--------------------

QUALIFICATIONS

	Description	Level	Typical interferences
EN 60068-2-6	Vibration	10 G (4...2000 Hz / ± 10 mmpp)	
EN 60068-2-27	Shock	100 G (impulse duration 6 ms)	
EN 55022	Emission, class B	< 30 dBµV/m (0.03 ... 1 GHz)	
EN 61000-4-2	Electrostatic discharge	8 kV contact / 15 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08 ... 2.7 GHz, 3s)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	4 kV	Motors, valves
EN 61000-4-5	Surge	Line-Line: 0.5 kV/42 Ω, Line-Earth: 1 kV/42 Ω	Overvoltage
EN 61000-4-6	Conducted RF	3 V (0.15 ... 80 MHz, 3 s)	Frequency converters

PHYSICAL SPECIFICATIONS

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (Standard), EPDM, Kalrez
Cable	PUR, FEP

(1) Hastelloy (C-276) on request

Equipment

CABLE SOCKET CONNECTOR

HART018	Cable socket M16 (Binder)
HART001	Cable Socket Connector DIN43650
HART002	Cable socket M16 (Binder 723), IP67, 5-pins
HART058	Cable Socket Connector DIN43650 MICRO

OVERVIEW

10.00.0091	Accessories overview

Additional documents

OPERATING AND SAFETY INSTRUCTIONS


	Article number
10.88.0092	DMM029

T3 (Ta: -40 ... 125°C) -25 ... 100°C compensated (allowed process temperature: -40 ... 150°C)		2
Option 1		
Throttle (9)		A
Special oil filling: Anderol Food (for food applications)		G
Special oil filling: AS100		J
Special oil filling: PAO4 (silicon free)		Q
Pressure connection elastomer free		N
Pressure connection welded		V
Option 2		
Option 3		
Active compensated, (≥ 500 mbar ... ≤ 100 bar)		E
Titanium		K
Seals: Viton (standard)		U
Seals: EPDM		S
Seals: Kalrez		T


- (4) Process connection available ≤ 600 bar
- (5) Cable socket connector not included
- (6) Please specify the required cable length and medium
- (7) For operating temperature $> 50^\circ\text{C}$, FEP cable must be used, with connector
- (8) Active compensated, with connector
- (9) Only with pressure connection Fig. 2, Fig. 3, Fig. 6 and Fig. 7
- (16) Connector side not to be used in Zone 0 or Ex ia IIC, explosion risk

Technical drawings






Pressure connections

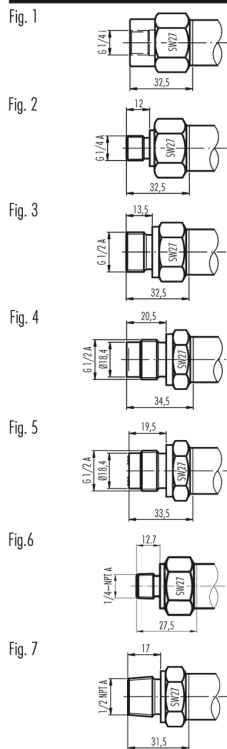

Dimensions

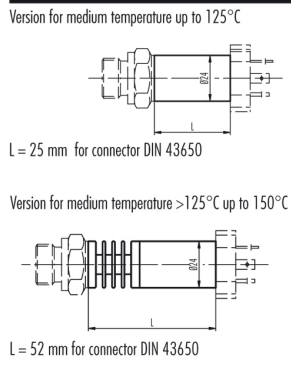

Electrical Connections

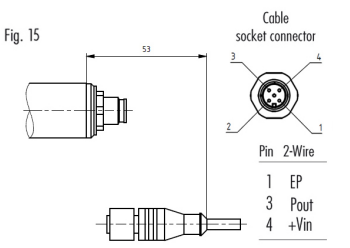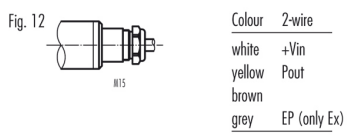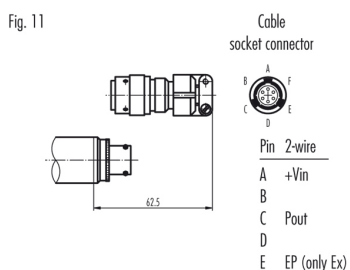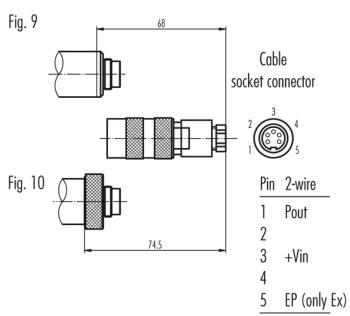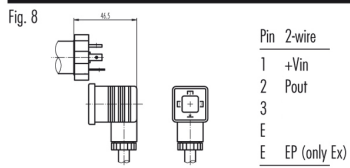

Specifications may change without notice.

ST5 Headquarters, Switzerland:
ST5 Sensor Technik, Sirmach AG
Rütihofstrasse 8 | 8370 Sirmach | Switzerland
sales@st5sensors.com | www.st5sensors.com

ST5 China:
ST5 Sensor Technology (Shanghai) Co. Ltd
Room 2603-2606 | North Building, Fortune | 108 Square
Lane 1839 | Qixin Road | Minhang District | Shanghai | China
sales@st5sensors.com | www.st5sensors.com.cn

ST5 France:
ST5 France
844 Route de la Caille | 74350 Allonziere la Caille | France
info-fr@st5sensors.com | www.st5sensors.fr

ST5 Germany:
ST5 Sensoren Transmitter Systeme GmbH
Poststrasse 7 | 71063 Sindelfingen | Germany
info-de@st5sensors.com | www.st5sensors.de

ST5 Great Britain:
ST5 Great Britain Ltd.
Box 3942 | Warwick | CV34 9AE | United Kingdom
contact@st5sensors.com | www.st5sensors.co.uk

ST5 Italy:
ST5 Italia s.r.l.
Via Lambro 36 | 20090 Opera (MI) | Italy
info-italia@st5sensors.com | www.st5sensors.it